



A roof panel that imitates the chaotic structure of hand-split wooden shingles

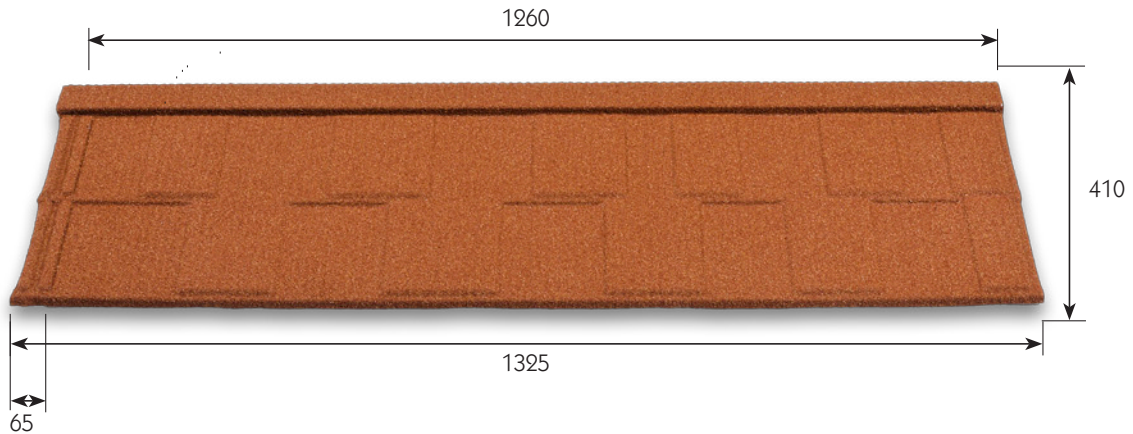

Units in mm

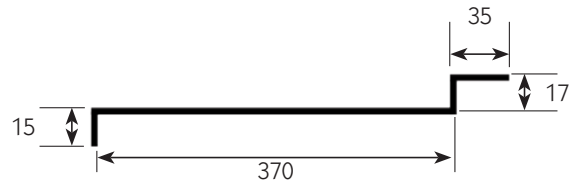

Design

The VIKSEN is designed to create a smaller hand-split wood pattern than the actual Shake profile, thus imparting an individual and rustic character to each building.

VIKSEN is a stone-coated panel pressed from a high grade of Zinc-Aluminium coated or equivalent steel and is available in a wide selection of colours to enhance any exterior colour scheme.

Installation

The roof panels can be interlocked either right over left or left over right with the side laps of one small corrugation.

The panels are placed onto battens spacing 370 mm.

The downturned front edge and the upturned rear edge of each tile provides a strong, weatherproof, overlapping and interlocking roof covering. Each panel is secured by 4 nails in the front-downturned edge into the side of the batten, positioned out of the water course.

Specifications

| | |
|---------------------------|--|
| Minimum pitch | 10° |
| Maximum pitch | 90° |
| Size of tile - overall* | 1325 x 410 mm (± 3 mm) |
| Size of tile - cover* | 1260 x 370 mm |
| Gauge of steel | 0,45 mm |
| Linear cover width* | 1260 mm |
| Coverage* | 0,47 m ² (2,15 tiles per m ²) |
| Weight per m ² | 6,4 kg |
| Weight per tile | 3,0 kg |

* The measurements and the weight may vary slightly by the finish that is added to the accessory.

** Steel thickness according to the EN 10346.

Packing

| | |
|--------------------|-------------------------|
| Pieces per pallet | 400 |
| Pallet composition | 20 stacks of 20 pieces |
| Pallet dimensions | 1400 x 1100 mm x 800 mm |